





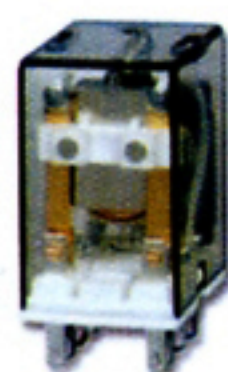









HH52P







HH53P

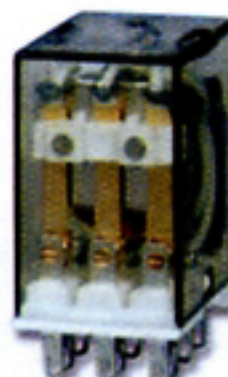





HH54P

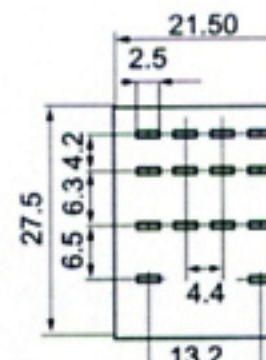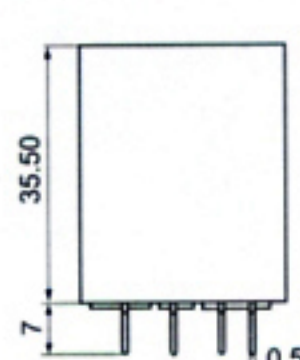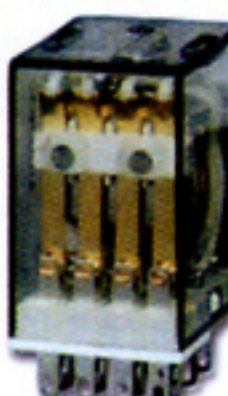

JQX-13FS 1Z




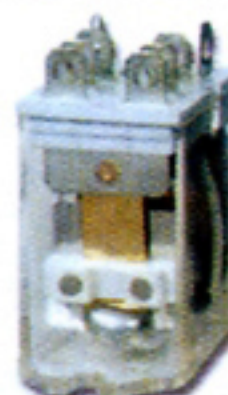


JQX-13FS 2Z

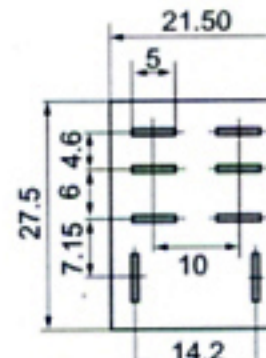
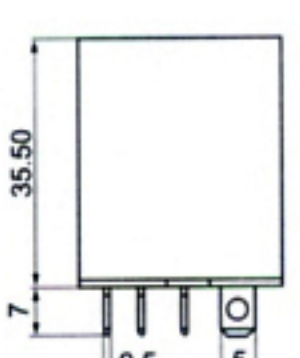
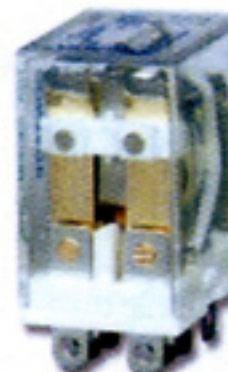


Model	Weight	Contact Capacity	Coil Normal Voltage	Coil Normal Power	Insulation Resistance	Contact Resistance	Dielectric Strength	Life Expectancy(ops)	Operating Temperature
HH52P	< 35g	5A 250VAC 5A 30VDC	DC 6V to 110V AC 6V to 240V	DC < 0.9W AC 0.9VA to 1.2VA	> 100mΩ	< 50mΩ	BOC 1000VAC BCC 1500VAC	Ele 100,000 Me 10,000,000	-40°C to 60°C
HH53P	< 35g	5A 250VAC 5A 30VDC	DC 6V to 110V AC 6V to 240V	DC < 0.9W AC 0.9VA to 1.2VA	> 100mΩ	< 50mΩ	BOC 1000VAC BCC 1500VAC	Ele 100,000 Me 10,000,000	-40°C to 60°C
HH54P	< 35g	3A 250VAC 3A 30VDC	DC 6V to 110V AC 6V to 240V	DC < 0.9W AC 0.9VA to 1.2VA	> 100mΩ	< 50mΩ	BOC 1000VAC BCC 1500VAC	Ele 100,000 Me 10,000,000	-40°C to 60°C
JQX-13F 1Z	< 35g	15A 250VAC 15A 30VDC	DC 6V to 110V AC 6V to 240V	DC < 0.9W AC 0.9VA to 1.2VA	> 100mΩ	< 50mΩ	BOC 1000VAC BCC 1500VAC	Ele 100,000 Me 10,000,000	-40°C to 60°C
JQX-13F 2Z	< 35g	10A 250VAC 10A 30VDC	DC 6V to 110V AC 6V to 240V	DC < 0.9W AC 0.9VA to 1.2VA	> 100mΩ	< 50mΩ	BOC 1000VAC BCC 1500VAC	Ele 100,000 Me 10,000,000	-40°C to 60°C




MY2







MY3








MY4

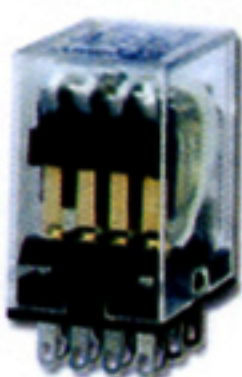

LY1


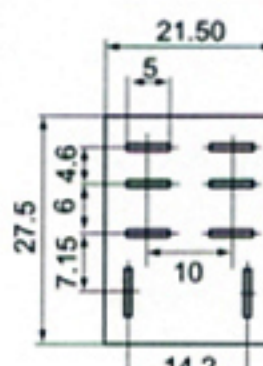

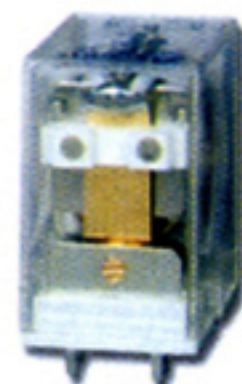


LY2



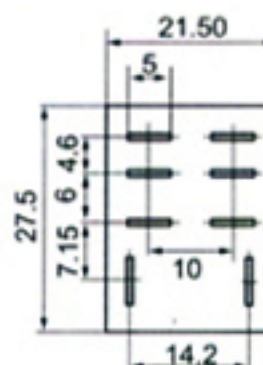

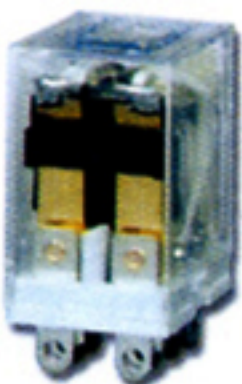


Model	Weight	Contact Capacity	Coil Normal Voltage	Coil Normal Power	Insulation Resistance	Contact Resistance	Dielectric Strength	Life Expectancy(ops) Electrical Mechanical	Operating Temperature
MY2	< 35g	5A 250VAC 5A 30VDC	DC 6V to 110V AC 6V to 240V	DC < 0.9W AC 0.9VA to 1.2VA	> 100mΩ	< 50mΩ	BOC 1000VAC BCC 1500VAC	Ele 100,000 Me 10,000,000	-40°C to 60°C
MY3	< 35g	5A 250VAC 5A 30VDC	DC 6V to 110V AC 6V to 240V	DC < 0.9W AC 0.9VA to 1.2VA	> 100mΩ	< 50mΩ	BOC 1000VAC BCC 1500VAC	Ele 100,000 Me 10,000,000	-40°C to 60°C
MY4	< 35g	3A 250VAC 3A 30VDC	DC 6V to 110V AC 6V to 240V	DC < 0.9W AC 0.9VA to 1.2VA	> 100mΩ	< 50mΩ	BOC 1000VAC BCC 1500VAC	Ele 100,000 Me 10,000,000	-40°C to 60°C
LY1	< 35g	15A 250VAC 15A 30VDC	DC 6V to 110V AC 6V to 240V	DC < 0.9W AC 0.9VA to 1.2VA	> 100mΩ	< 50mΩ	BOC 1000VAC BCC 1500VAC	Ele 100,000 Me 10,000,000	-40°C to 60°C
LY2	< 35g	10A 250VAC 10A 30VDC	DC 6V to 110V AC 6V to 240V	DC < 0.9W AC 0.9VA to 1.2VA	> 100mΩ	< 50mΩ	BOC 1000VAC BCC 1500VAC	Ele 100,000 Me 10,000,000	-40°C to 60°C






LY3 (HH63P)

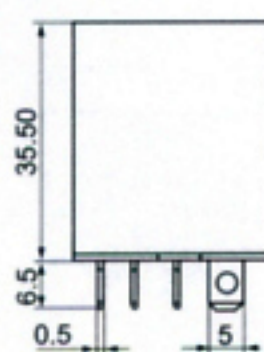





LY4 (HH64P)

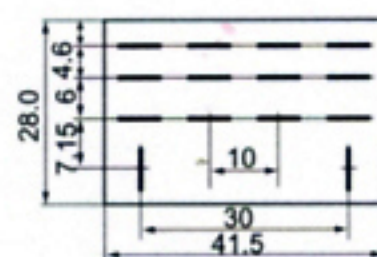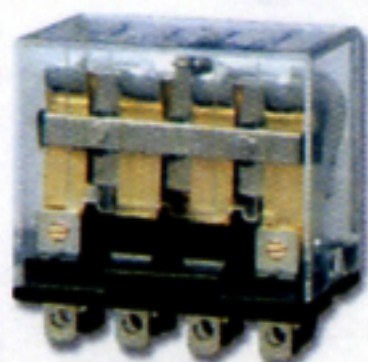





TYPE 58.02

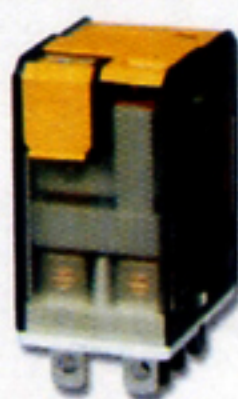

TYPE 56.02


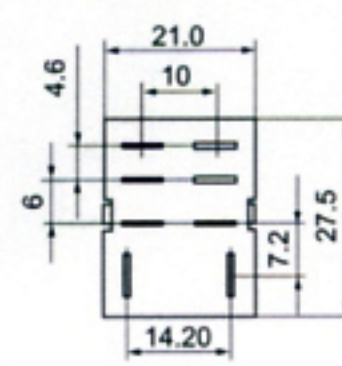
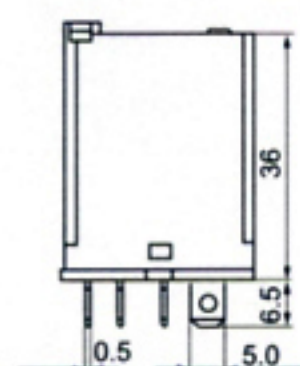
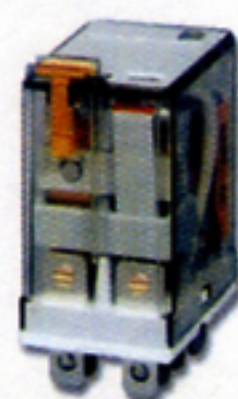


TYPE 56.04


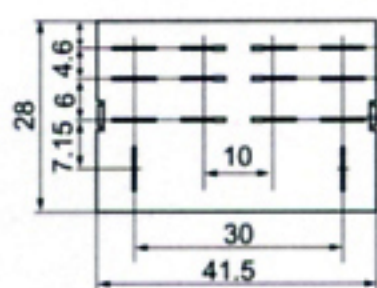

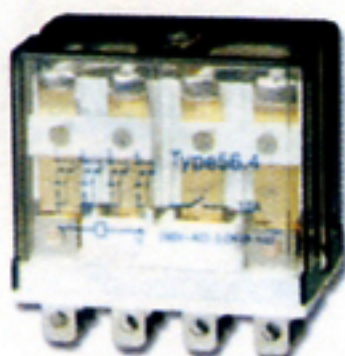


Model	Weight	Contact Capacity	Coil Normal Voltage	Coil Normal Power	Insulation Resistance	Contact Resistance	Dielectric Strength	Life Expectancy(ops) Electrical Mechanical	Operating Temperature
LY3 (HH63P)	< 50g	10A 250VAC 10A 28VDC	DC 6V to 110V AC 6V to 240V	DC < 1.4W AC < 2.0VA	> 100mΩ	< 50mΩ	BOC 1000VAC BCC 1500VAC	Ele 100,000 Me 10,000,000	-40°C to 70°C
LY4 (HH64P)	< 70g	10A 250VAC 10A 28VDC	DC 6V to 110V AC 6V to 240V	DC < 1.6W AC < 2.5VA	> 100mΩ	< 50mΩ	BOC 1000VAC BCC 1500VAC	Ele 100,000 Me 10,000,000	-40°C to 70°C
TYPE58.02	< 35g	10A 250VAC 10A 28VDC	DC 6V to 110V AC 6V to 240V	DC < 0.9W AC 0.9VA to 1.2VA	> 100mΩ	< 50mΩ	BOC 1000VAC BCC 1500VAC	Ele 100,000 Me 10,000,000	-40°C to 70°C
TYPE56.02	< 35g	10A 250VAC 10A 28VDC	DC 6V to 110V AC 6V to 240V	DC < 0.9W AC 0.9VA to 1.2VA	> 100mΩ	< 50mΩ	BOC 1000VAC BCC 1500VAC	Ele 100,000 Me 10,000,000	-40°C to 70°C
TYPE56.04	< 70g	10A 250VAC 10A 28VDC	DC 6V to 110V AC 6V to 240V	DC < 1.6W AC < 2.5VA	> 100mΩ	< 50mΩ	BOC 1000VAC BCC 1500VAC	Ele 100,000 Me 10,000,000	-40°C to 70°C






JQX-10F 2Z
JTX-2C

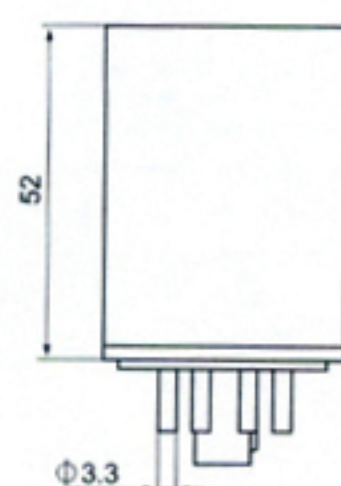






JQX-10F 3Z
JTX-3C

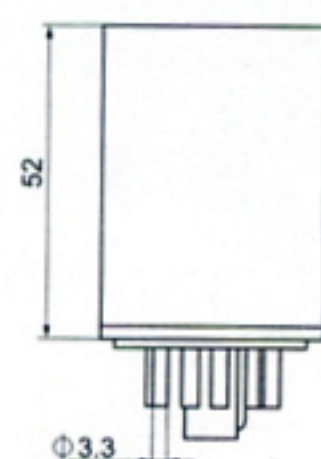

MK-2P

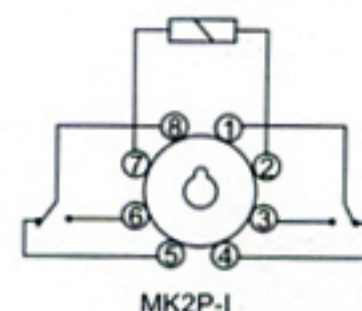
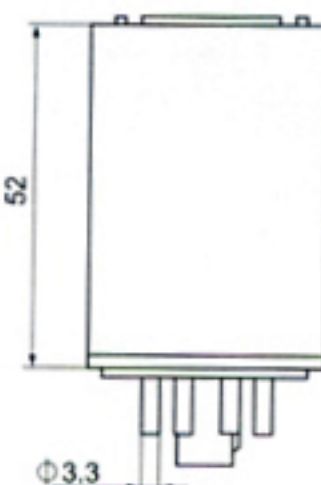
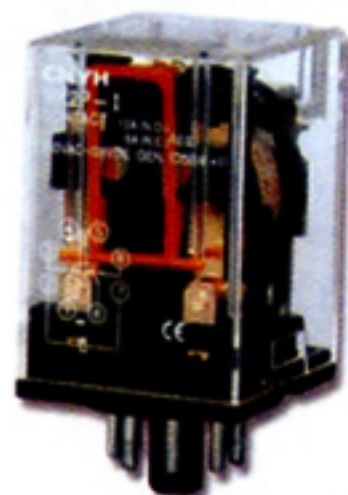


MK-3P




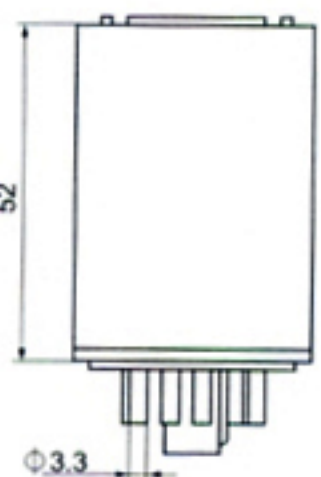


Model	Weight	Contact Capacity	Coil Normal Voltage	Coil Normal Power	Insulation Resistance	Contact Resistance	Dielectric Strength	Life Expectancy(ops) Electrical Mechanical	Operating Temperature
JQX-10F2Z JTX-2C	< 80g	10A 250VAC 10A 30VDC	DC 6V to 220V AC 6V to 380V	DC < 1.6W AC < 2.8VA	> 100mΩ	< 50mΩ	BOC 1500VAC BCC 1500VAC	Ele 100,000 Me 10,000,000	-40℃ to 60℃
JQX-10F3Z JTX-3C	< 80g	10A 250VAC 10A 30VDC	DC 6V to 220V AC 6V to 380V	DC < 1.6W AC < 2.8VA	> 100mΩ	< 50mΩ	BOC 1500VAC BCC 1500VAC	Ele 100,000 Me 10,000,000	-40℃ to 60℃
MK-2P	< 80g	10A 250VAC 10A 30VDC	DC 6V to 220V AC 6V to 380V	DC < 1.6W AC < 2.8VA	> 500mΩ	< 50mΩ	BOC 1500VAC BCC 1500VAC	Ele 100,000 Me 10,000,000	-40℃ to 60℃
MK-2P	< 80g	10A 250VAC 10A 28VDC	DC 6V to 220V AC 6V to 380V	DC < 1.6W AC < 2.8VA	> 500m	< 50mΩ	BOC 1500VAC BCC 1500VAC	Ele 100,000 Me 10,000,000	-40℃ to 60℃





JQX-53F 2Z

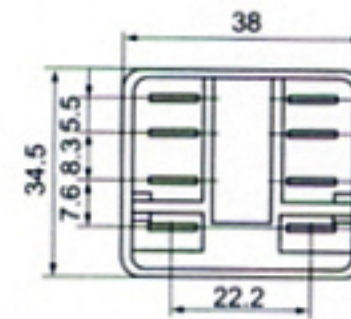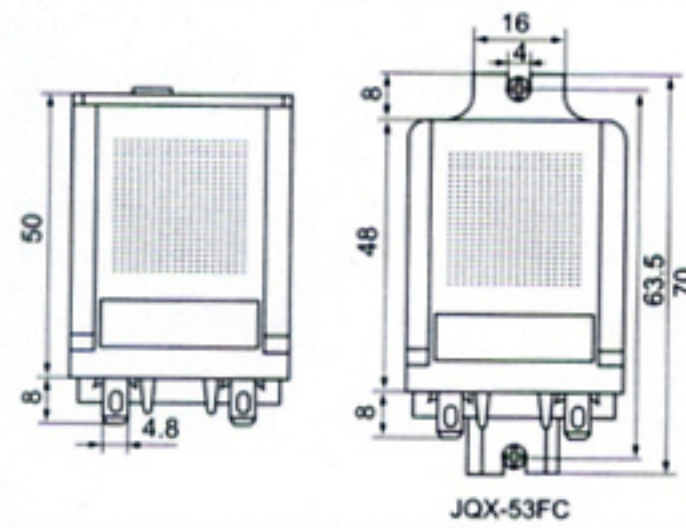






JQX-53F 3Z

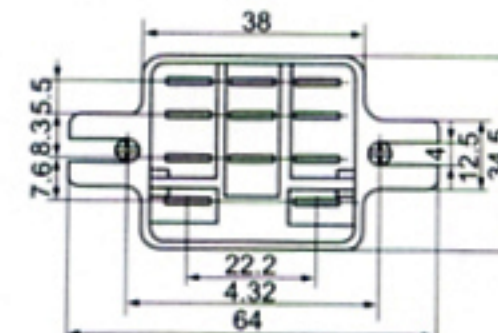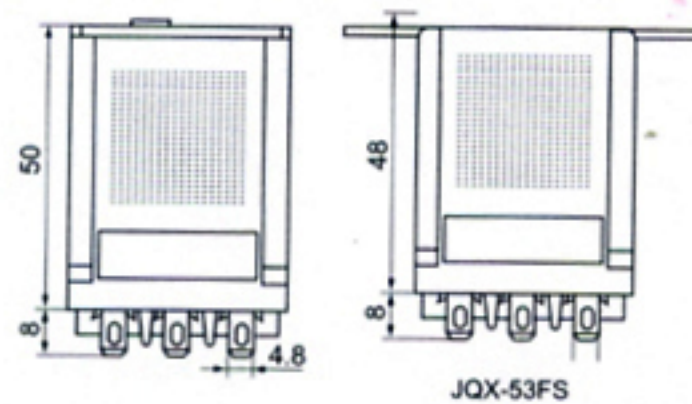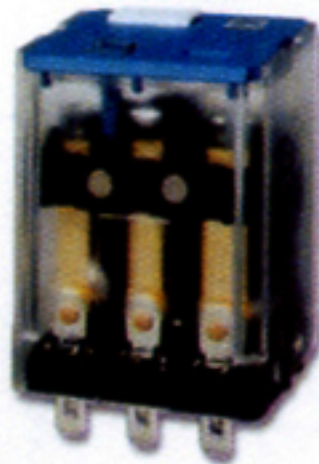

AS-2P-U

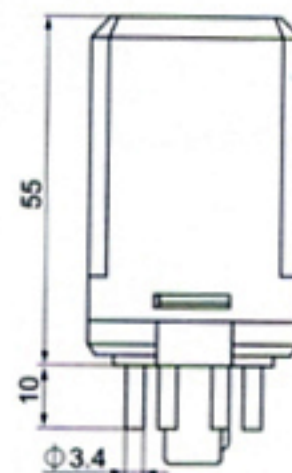

AS-3P-U

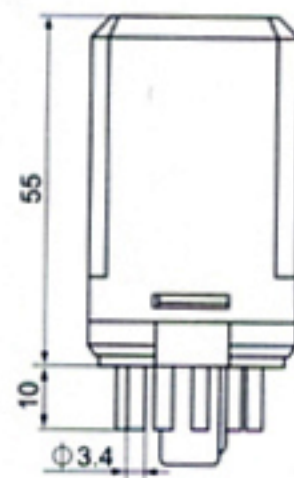

Model	Weight	Contact Capacity	Coil Normal Voltage	Coil Normal Power	Insulation Resistance	Contact Resistance	Dielectric Strength	Life Expectancy(ops) Electrical Mechanical	Operating Temperature
JQX-53F2Z	< 125g	10A 250VAC 10A 28VDC	DC 6V to 220V AC 6V to 380V	DC < 1.5W AC < 2.8VA	> 100mΩ	< 50mΩ	BOC 1500VAC BCC 1500VAC	Ele 100,000 Me 10,000,000	-40℃ to 70℃
JQX-53F3Z	< 125g	10A 250VAC 10A 28VDC	DC 6V to 220V AC 6V to 380V	DC < 1.5W AC < 2.8VA	> 100mΩ	< 50mΩ	BOC 1500VAC BCC 1500VAC	Ele 100,000 Me 10,000,000	-40℃ to 70℃
AS-2P-U	< 125g	10A 250VAC 10A 28VDC	DC 6V to 220V AC 6V to 380V	DC < 2.0W AC < 3.5VA	> 500mΩ	< 50mΩ	BOC 1500VAC BCC 1500VAC	Ele 100,000 Me 10,000,000	-40℃ to 70℃
AS-3P-U	< 125g	10A 250VAC 10A 28VDC	DC 6V to 220V AC 6V to 380V	DC < 2.0W AC < 3.5VA	> 500m	< 50mΩ	BOC 1500VAC BCC 1500VAC	Ele 100,000 Me 10,000,000	-40℃ to 70℃