





S-N10



S-N25

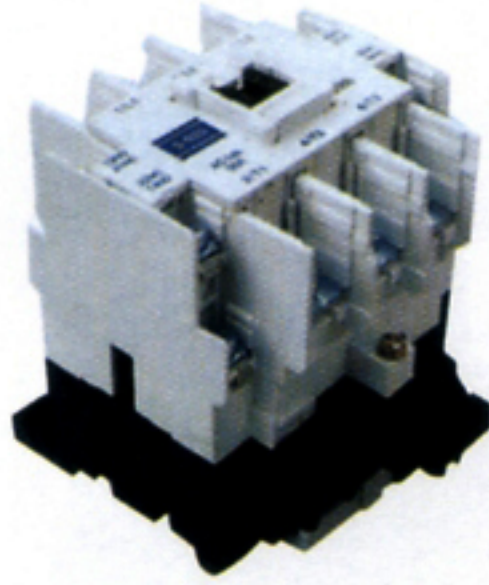

LA1-DN11

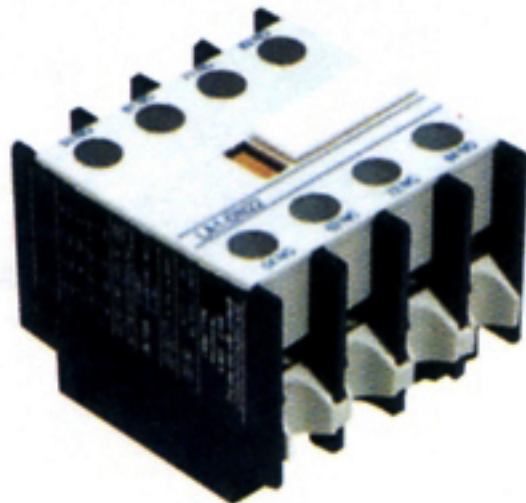

LA1-DN22



LA2-D

S-N Ac Contactor

Application

S-N series AC contactors are suitable for AC 50Hz or 60Hz, rated voltage up to 660V, mainly used as remote making, breaking circuit and frequently starting or controlling AC motor. It can also be used for counter-connection breaking of squirrel-cage motor in the case of reducing working current.

Specifications

Type	Capacity of 3phase squirrel-cage motor AC-3								Rated heating current I _{th} (A)
	rated power (KW)				Rated operating current (A)				
	.220V-240V	.380V-440V	.550V	.660V	.220V-240V	.380V-440V	.550V	.660V	
S-N10	2.5	4.0	4.0	4.0	11	9	7	5	20
S-N11	3.5	5.5	5.5	5.5	13	12	9	7	20
S-N12	3.5	5.5	5.5	5.5	13	12	9	7	20
S-N20	5.5	11	11	7.5	22	22	17	9	32
S-N21	5.5	11	11	7.5	22	22	17	9	32
S-N25	8.5	14	14	14	30	30	12	12	40
S-N35	12	20	20	20	40	40	17	17	40

LA1-D Contact Blocks

Application

LA1-D series Auxiliary contact blocks are installed at the top of CA2-D control relay or LC1-D AC contacts points. Owing to adopting the contacting functions of sliding frictions, the item can be self-cleaning & ensure the electric circuit to be reliable.

Specifications

Type	LA1-DN02	LA1-DN11	LA1-DN20	LA1-DN22	LA1-DN40	LA1-DN04	LA1-DN13	LA1-DN31
contact number	2NC	NO+NC	2NO	2No+2NC	4NO	4NC	1NO+3NC	3NO+NC

SC Ac Contactor

Application

SC AC contactor is suitable for using in the circuits voltage up to 660V 50Hz or 60Hz, rated current up to 150A, for making & breaking, and for frequently starting & controlling the motor.

The product has the features of small size, light weight, low power consumption, high efficiency, safety, reliability etc. It also can be combined with contact head group, timer delay block, relay, thermal relay accessories, into motor starter etc. It conforms with IEC158 & IEC337.