

GT Cable Connecting

Application

GT series cable connectors are applicable for the connection of the circular wire with power supply cable in distribution equipment. They are made of tin coated 99.9% percent pure copper tube and coated in.

Technical specification

Type	D(mm)	d(mm)	L(mm)
GT-1.5	3.7	1.8	20
GT-2.5	4	2.5	20
GT-4	4.8	3.1	20
GT-5.5	5.5	3.8	25
GT-10	6.8	4.8	30
GT-16	7.5	5.5	35
GT-25	9	7	40
GT-35	10.5	8.2	45
GT-50	12.5	9.8	50
GT-70	14.5	11.5	55
GT-95	17.5	13.5	60
GT-120	19.5	15	65
GT-150	21	16.5	70
GT-185	23.5	18.5	75
GT-240	26.5	21	80
GT-300	30	24	85
GT-400	34	27	90
GT-500	38	30	100
GT-630	45	35	110
GT-800	50	40	150
GT-1000	56	44	170

Metal Cable Clamp



CU8-50²
AL16-70²/12m²

CU8-50²
AL16-70²-1


CU8-50²
AL16-70²-2



AL16²-70²-1

AL16²-70²-2


AL30²-300²

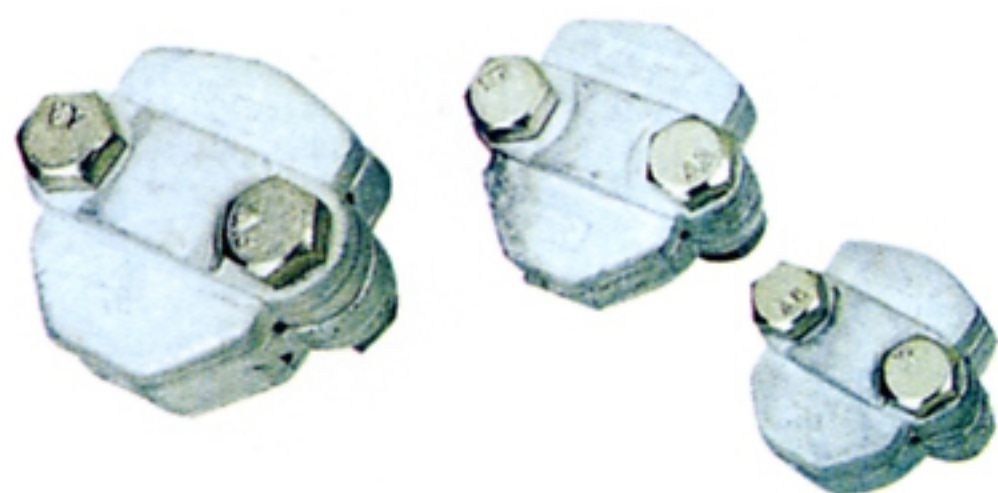

AL95²-120²

AL50²-70²

AL25²-35²

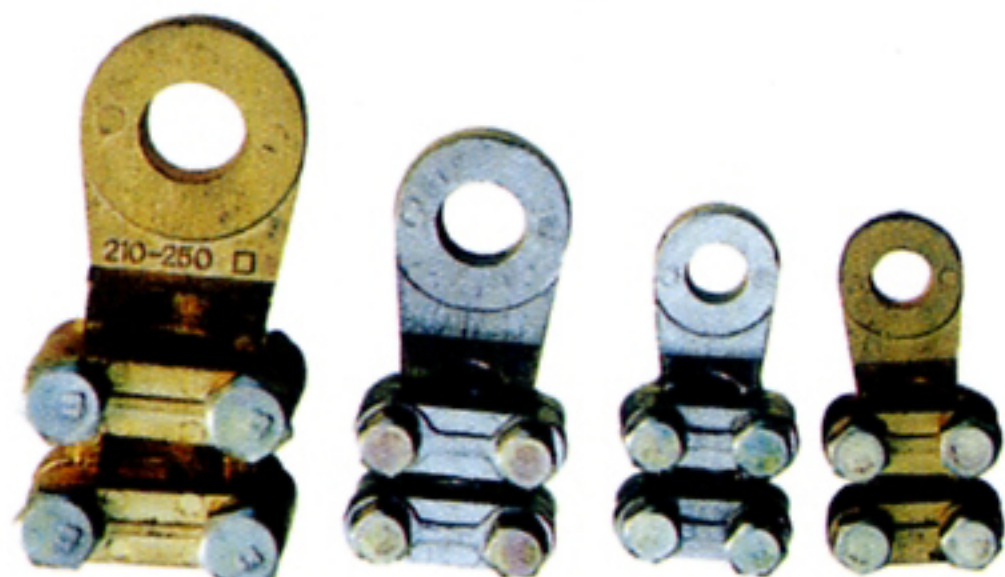

B Wintersweet Type Red Copper Jointing Clamp

Application

It is suitable for transition connection of the electric appliances with wire and cable in indoor distribution equipment, made of brass by die cast and coated nickel.

Technical specification

Type	L	A	B	d
B16-25	37	10	21	7.5
B25-35	48	13	22	11
B50-70	60	17	31	11
B120-150	70	23	35	15
B210-250	90	30	46	17